

Return address: P.O. Box 2220, 6802 CE ARNHEM, The Netherlands

KDF Co., Ltd.
110-3, Sinbong-gil
Yeongin-myeon
Asan-si
Chungnam
336-822
Rep. of Korea

TÜV Rheinland Nederland B.V.
The Netherlands

Postal address:
P.O. Box 2220
6802 CE ARNHEM

Parking and delivery:
Westervoortsedijk 73
6827 AV ARNHEM

www.tuv.com/nl

T +31 88 888 7888

Jaring.de.Wolff@nl.tuv.com

Testreport

Project number: 89210096
Report number: 89210096.01br

Date
05/08/2016

Project number
89210096

Report number
89210096.01br

Phone number client
-

Received:

A resilient floor covering, marked as: "0.55/5T Loose-Lay";
TÜV-reference: MT16-112331.01

Fax number client
-

Sampling procedure:

The samples are selected by the applicant. The test house has had no influence on the sampling procedure.

The samples have been received in week 26 of 2016.

Order:

Classification of burning behaviour according to EN 13501-1:2007+ A1:2009.

Article
0.55/5T Loose-Lay

Test methods: Ignitability of products subjected to direct impingement of flame (ISO 11925-2:2010/C1:2011) and determination of the burning behaviour using a radiant heat source (ISO 9239-1:2010)

Appendix
I : Flooring Radiant Panel Single Specimen Report – 8 pages

Results:

See page three and four.

Appendix:

See page five up to and including twelve.

PRODUCT IDENTIFICATION

Applicant : KDF Co., Ltd.
Name : **0.55/5T Loose-Lay***
Type of colouring/patterning : Wild*
Batch number : 2016.6.13*
Dimensions : 177.8mm x 1219.2mm*
Total thickness : 5 mm*
Thickness of wearlayer : 0.55 mm*

Date
05/08/2016

Project number
89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
2/12

Total thickness (mm) : 5.0**
Total mass (gr/m²) : 8405**
Density (kg/m³) : 1674**

* Applicant's declaration

** Determination by the test house after conditioning to constant mass is achieved.



Figure 1, Picture of the received sample (surface)



Figure 2, Picture of the received sample (back)

Date
05/08/2016

Project number
89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
3/12

TEST RESULTS

Ignitability of products subjected to direct impingement of flame Method EN ISO 11925-2 :2010/C1:2011

Date of testing : 27/07/2016
 Conditioning time, climate : ≥ 7 days, 23 ± 2 °C and 50 ± 5 %
 Description of substrate : Fibre cement board, 8 ± 2 mm, 1800 ± 200 kg/m³
 conforming to EN 13238.
 Flame application : Surface.
 Flame application time : 15 seconds.

Orientation:	Length			Width		
Total burning time ¹	15	15	15	15	15	15
Flame tip reaches 150 mm (s)	No	No	No	No	No	No
Extent of damaged area, length (mm)	65	58	60	60	60	58
Extent of damaged area, width (mm)	12	12	12	12	12	12
Material melts (yes/no)	Yes	Yes	Yes	Yes	Yes	Yes
Shrinks away ² (yes/no)	No	No	No	No	No	No
Glowing ³ (sec)	No	No	No	No	No	No
Flaming debris (yes/no)	No	No	No	No	No	No
Ignition of filter paper (yes/no)	No	No	No	No	No	No

¹ Inclusive a flame application time of 15 or 30 seconds with surface or edge impingement

² Shrinks away from flame without being ignited

³ The time at which it occurs and its duration

Determination of the burning behaviour using a radiant heat source Method EN ISO 9239-1:2010

Date of testing : 27/07/2017
 Conditioning time, climate : ≥ 7 days, 23 ± 2 °C and 50 ± 5 %
 Description of substrate : Fibre cement board, 8 ± 2 mm, 1800 ± 200 kg/m³
 conforming to EN 13238.
 Sampling procedure : By contractor.
 Description of cleaning used : None.
 Fixing method : None, sample is tested loose laid on the substrate.

Test specimen, orientation	Flame spread (cm)	CRF (kW/m ²)	Peak light attenuation (%)	Smoke production (%.min)
1, Length	24.0	8.5	41.3	182
2, Width	26.0	8.1	39.9	189
3, Width	28.0	7.8	51.2	234
4, Width	15.0	10.0	42.2	144
Mean, Width	23.0	8.6	44.4	189

Specimen 1, 2, 3 and 4: Flashing, transitory- or sustained flaming are observed.

Specimen 1, 2, 3 and 4: Extinguished naturally before the end of the test duration

Date
05/08/2016

Project number
89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
4/12

CONCLUSION

According to EN 13501-1:2007+ A1:2009 the tested sample of the aforementioned quality “**0.55/5T Loose-Lay**”, in relation to its reaction to fire behaviour is classified: **B_n**.

The additional classification in relation to smoke production is: **s1**.

The aforementioned quality meets the requirement of reaction to fire classification: B_n – s1

The classification is valid for the following end use applications:

- End use substrates of classes A1 and A2-s1,d0.
- Any way of fixation, glued down or loose laid.

Statements:

The test results only relate to the behaviour of the test specimens of the examined product under the particular conditions of the test in laboratory conditions; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use. The method might not be suitable if the product is exposed to much larger flames or heat radiant sources.

The validity of this report will expire directly after alterations or modifications of the examined product (combination)(s) and/or the criteria. This report shall not be reproduced, except in full, without the written approval of the testing laboratory.

This document does not represent type approval or certification of the product.

Author:
Mr. J. de Wolff



Review:
Mrs. E. Zwier



All rights reserved.

No part of this report may be reproduced, provided to and/or examined by third parties, and/or published by print, photoprint, microfilm, in electronic form or any other means without the explicit previous written consent of TÜV Rheinland Nederland B.V. The results are based upon the samples received and have not to be representative for the total production. TÜV Rheinland Nederland B.V. had no influence on the sampling.

In case this report was drafted within the context of an assignment to TÜV Rheinland Nederland B.V., the rights and obligations of contracting parties are subject to the General Terms & Conditions for Advisory, Research and Certification assignments to TÜV Rheinland Nederland B.V. and/or the relevant agreement concluded between the contracting parties.

© 2010 TÜV Rheinland Nederland B.V.

(End of report)

Date
05/08/2016

Project number
89210096

page 1

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
5/12

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010
Laboratory : TÜV Rheinland Nederland B.V.
Sponsor : TÜV Rheinland Korea 89210096
Date of test : Jul. 27 2016

Specimen description : 0.55 5T Loose lay MT16-112331.01
Test name : # 1 Prod
File name : D:\FRPFILES\16070022.CSV
Test number in series : 4

Flux calibration file name : C:\FRPSOFT2.9A\CALIB\FLX16010.CSV

Thickness (mm) : 5
Density (kg/m³) : 1674

Test duration : 13 minutes 30 seconds (810 s)
Substrate used? : Yes
Substrate : Calcium silicate
Fixing method : None (loose laid)
Conditioned? : Yes
Conditioning temp. (°C) : 23
Conditioning RH (%) : 50

Test Results

Time to ignition : 2 minutes 05 seconds (125 s)
Time to flameout : 13 minutes 27 seconds (807 s)
Extent of burning (mm) : 240
Critical flux at extinguishment (kW/m²) : 8.49
HF-10 (kW/m²) : 8.67
HF-20 (kW/m²) : Not calculated (test duration < 20 minutes)
HF-30 (kW/m²) : Not calculated (test duration < 30 minutes)
Flame spread at 10 minutes (mm) : 230
Flame spread at 20 minutes (mm) : Not measured
Flame spread at 30 minutes (mm) : Not measured
Peak light attenuation (%) : 41.25
Time to peak light attenuation : 6 minutes 52 seconds (412 s)
Total integrated smoke (%.min) : 181.79
Potential classification : A2(0)/B(0)
Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software


Date
05/08/2016

page 2 **Project number**
89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
6/12

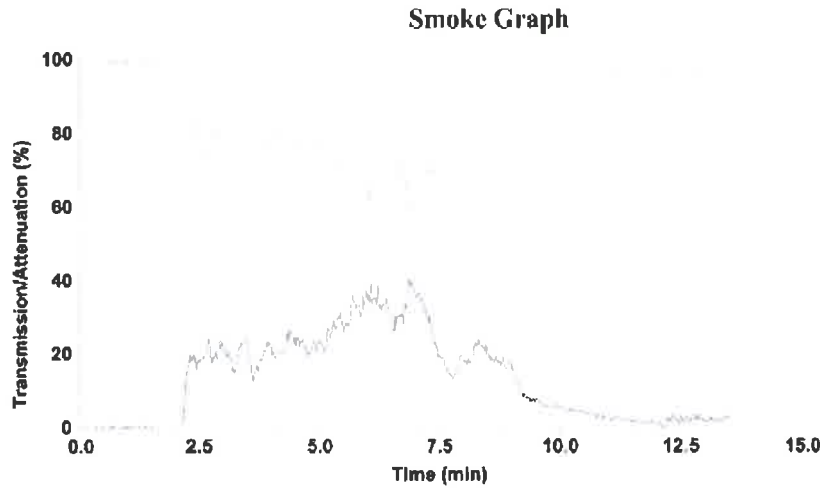

Test name : # 1 Prod
File name : D:\FRPFILES\16070022.CSV

Rake Results

Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)	Position (mm)	Time (s)	Flux (kW/m²)	Qsb (MJ/m²)
60	185	11.3	2.092	510	-	3.7	-
110	258	10.5	2.712	560	-	3.1	-
160	427	9.8	4.196	610	-	2.6	-
210	538	9.0	4.852	660	-	2.2	-
260	-	8.1	-	710	-	1.9	-
310	-	7.3	-	760	-	1.6	-
360	-	6.3	-	810	-	1.4	-
410	-	5.3	-	860	-	1.3	-
460	-	4.4	-	910	-	1.2	-

Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Date
05/08/2016

Project number
Page 1 89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
7/12

Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010
Laboratory : TÜV Rheinland Nederland B.V.
Sponsor : TÜV Rheinland Korea 89210096
Date of test : Jul. 27 2016

Specimen description : 0.55 5T Loose lay MT16-112331.01
Test name : # 2 Cross
File name : D:\FRPFILES\16070023.CSV
Test number in series : 4

Flux calibration file name : C:\FRPSOFT2.9A\CALIB\FLX16010.CSV

Thickness (mm) : 5
Density (kg/m³) : 1674

Test duration : 12 minutes 27 seconds (747 s)
Substrate used? : Yes
Substrate : Calcium silicate
Fixing method : None (loose laid)
Conditioned? : Yes
Conditioning temp. (°C) : 23
Conditioning RH (%) : 50

Test Results

Time to ignition : 2 minutes 09 seconds (129 s)
Time to flameout : 12 minutes 25 seconds (745 s)
Extent of burning (mm) : 260
Critical flux at extinguishment (kW/m²) : 8.14
HF-10 (kW/m²) : 8.49
HF-20 (kW/m²) : Not calculated (test duration < 20 minutes)
HF-30 (kW/m²) : Not calculated (test duration < 30 minutes)
Flame spread at 10 minutes (mm) : 240
Flame spread at 20 minutes (mm) : Not measured
Flame spread at 30 minutes (mm) : Not measured
Peak light attenuation (%) : 39.91
Time to peak light attenuation : 5 minutes 34 seconds (334 s)
Total integrated smoke (%.min) : 188.52

Potential classification : A2(II)/B(II)
Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software


Date
05/08/2016

page 2 Project number
89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
8/12

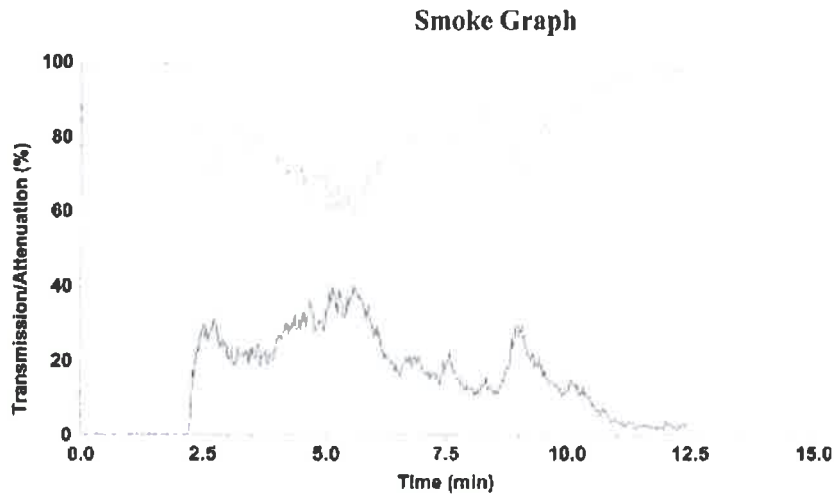

Test name : # 2 Cross
File name : D:\FRPFILES\16070023.CSV

Rake Results

Position (mm)	Time (s)	Flux (kW/m ²)	Qsb (MJ/m ²)	Position (mm)	Time (s)	Flux (kW/m ²)	Qsb (MJ/m ²)
60	182	11.3	2.058	510	-	3.7	-
110	260	10.5	2.733	560	-	3.1	-
160	428	9.8	4.206	610	-	2.6	-
210	549	9.0	4.951	660	-	2.2	-
260	676	8.1	5.499	710	-	1.9	-
310	-	7.3	-	760	-	1.6	-
360	-	6.3	-	810	-	1.4	-
410	-	5.3	-	860	-	1.3	-
460	-	4.4	-	910	-	1.2	-

Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Date
05/08/2016

Project number
89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
9/12

Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010
Laboratory : TÜV Rheinland Nederland B.V.
Sponsor : TÜV Rheinland Korea 89210096
Date of test : Jul. 27 2016

Specimen description : 0.55 5T Loose lay MT16-112331.01
Test name : # 3 Cross
File name : D:\FRPFILES\16070024.CSV
Test number in series : 4

Flux calibration file name : C:\FRPSOFT2.9A\CALIB\FLX16010.CSV

Thickness (mm) : 5
Density (kg/m³) : 1674

Test duration : 14 minutes 15 seconds (855 s)
Substrate used? : Yes
Substrate : Calcium silicate
Fixing method : None (loose laid)
Conditioned? : Yes
Conditioning temp. (°C) : 23
Conditioning RH (%) : 50

Test Results

Time to ignition : 2 minutes 05 seconds (125 s)
Time to flameout : 14 minutes 13 seconds (853 s)
Extent of burning (mm) : 280
Critical flux at extinguishment (kW/m²) : 7.81
HF-10 (kW/m²) : 8.31
HF-20 (kW/m²) : Not calculated (test duration < 20 minutes)
HF-30 (kW/m²) : Not calculated (test duration < 30 minutes)
Flame spread at 10 minutes (mm) : 250
Flame spread at 20 minutes (mm) : Not measured
Flame spread at 30 minutes (mm) : Not measured
Peak light attenuation (%) : 51.18
Time to peak light attenuation : 5 minutes 24 seconds (324 s)
Total integrated smoke (%.min) : 233.82
Potential classification : C(n)
Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

Date
05/08/2016

Project number
89210096


Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
10/12

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

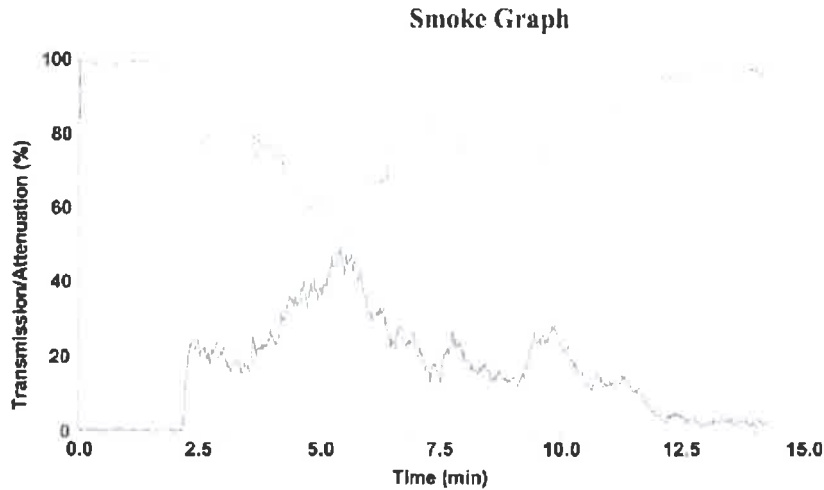

Test name : # 3 Cross
File name : D:\FRPFILES\16070024.CSV

Rake Results

Position (mm)	Time (s)	Flux (kW/m ²)	Qsb (MJ/m ²)	Position (mm)	Time (s)	Flux (kW/m ²)	Qsb (MJ/m ²)
60	193	11.3	2.183	510	-	3.7	-
110	264	10.5	2.775	560	-	3.1	-
160	364	9.8	3.577	610	-	2.6	-
210	459	9.0	4.140	660	-	2.2	-
260	628	8.1	5.109	710	-	1.9	-
310	-	7.3	-	760	-	1.6	-
360	-	6.3	-	810	-	1.4	-
410	-	5.3	-	860	-	1.3	-
460	-	4.4	-	910	-	1.2	-

Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test, they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Date
05/08/2016

page 1 **Project number**
89210096

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
11/12

Flooring Radiant Panel Single Specimen Report

Standard : EN ISO 9239-1:2010
Laboratory : TÜV Rheinland Nederland B.V.
Sponsor : TÜV Rheinland Korea 89210096
Date of test : Jul. 27 2016

Specimen description : 0.55 5T Loose lay MT16-112331.01
Test name : # 4 Cross
File name : D:\FRPFILES\16070025.CSV
Test number in series : 4

Flux calibration file name : C:\FRPSOFT2.9A\CALIB\FLX16010.CSV

Thickness (mm) : 5
Density (kg/m³) : 1674

Test duration : 12 minutes 10 seconds (730 s)
Substrate used? : Yes
Substrate : Calcium silicate
Fixing method : None (loose laid)
Conditioned? : Yes
Conditioning temp. (°C) : 23
Conditioning RH (%) : 50

Test Results

Time to ignition : 2 minutes 03 seconds (123 s)
Time to flameout : 12 minutes 08 seconds (728 s)
Extent of burning (mm) : 150
Critical flux at extinguishment (kW/m²) : 9.96
HF-10 (kW/m²) : 9.96
HF-20 (kW/m²) : Not calculated (test duration < 20 minutes)
HF-30 (kW/m²) : Not calculated (test duration < 30 minutes)
Flame spread at 10 minutes (mm) : 150
Flame spread at 20 minutes (mm) : Not measured
Flame spread at 30 minutes (mm) : Not measured
Peak light attenuation (%) : 42.15
Time to peak light attenuation : 5 minutes 41 seconds (341 s)
Total integrated smoke (%.min) : 143.88
Potential classification : A2(0)/B(0)
Smoke production classification : s1

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

APPENDIX I: Flooring Radiant Panel Single Specimen Report

Report produced with the Fire Testing Technology FRPSoft software

Date
05/08/2016

Project number
89210096


page 2

Report number
89210096.01br

Article
0.55/5T Loose-Lay

Page
12/12

Smoke Graph

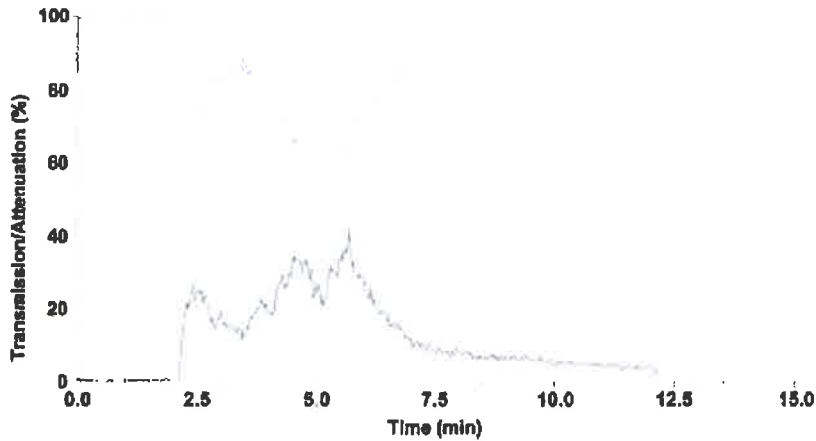

Test name : # 4 Cross
File name : D:\FRPFILES\16070025.CSV

Rake Results

Position (mm)	Time (s)	Flux (kW/m ²)	Qsb (MJ/m ²)	Position (mm)	Time (s)	Flux (kW/m ²)	Qsb (MJ/m ²)
60	205	11.3	2.319	510	-	3.7	-
110	310	10.5	3.259	560	-	3.1	-
160	-	9.8	-	610	-	2.6	-
210	-	9.0	-	660	-	2.2	-
260	-	8.1	-	710	-	1.9	-
310	-	7.3	-	760	-	1.6	-
360	-	6.3	-	810	-	1.4	-
410	-	5.3	-	860	-	1.3	-
460	-	4.4	-	910	-	1.2	-

Comments

Specimen extinguished naturally.

These results relate only to the behaviour of the specimens of the product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

RELATÓRIO DE ENSAIO Nº 1 115 081-203

CLIENTE: Belgotex do brasil Indústria de Carpetes LTDA.
CNPJ: 02.305.606/0001-60
Av. José Carlos Gomes, 355 – Distrito Industrial
84043-737 – Ponta Grossa - PR

NATUREZA DO TRABALHO: Determinação de ftalatos

REFERÊNCIA: *E-mail* de 05.12.2019
Orçamento FIPT Nº 15083/19 de 06.12.2019
Aprovação do orçamento recebida em 10.12.2019

1 MATERIAL

Foi fornecida pelo cliente, em 18.12.2019, uma peça polimérica identificada como “Piso vinílico Hercules Square”. Esse material foi identificado no laboratório como LAQ 6437-19.

Nota: A coleta/amostragem do material foi de responsabilidade do cliente.

2 MÉTODO UTILIZADO

NBR 16040:2012 – “Determinação de plastificantes ftálicos por cromatografia gasosa”.

Equipamentos:

- Balança analítica (AUW-220D), marca Shimadzu, modelo AUW-220D. Validade da Calibração: Abril/2021.
- Cromatógrafo a gás (GC 2010/1) marca Shimadzu, modelo GC 2010.

Nota: A análise foi realizada entre os dias 19.12.2019 e 09.01.2020.

Os resultados apresentados neste documento se aplicam apenas ao item ensaiado ou calibrado.
Este documento não dá direito ao uso do nome ou da marca IPT, para quaisquer fins, sob pena de indenização.
A reprodução deste documento só poderá ser feita integralmente, sem nenhuma alteração.

Laboratório de Análises Químicas/ CQuiM/IPT

Laboratório de Ensaio acreditado pela Cgcre/Inmetro de acordo com a ABNT NBR ISO/IEC 17025, sob o número 0249.

3 RESULTADOS

A verificação da presença dos plastificantes ftálicos consta da Tabela 1, a seguir:

Tabela 1 – Resultados.

Plastificantes ftálicos	Resultados (%)
Ftalato de di-butila (DBP) (C ₁₆ H ₂₂ O ₄)	< 0,1
Ftalato de di-isobutila (DIBP) (C ₁₆ H ₂₂ O ₄)	< 0,1
Ftalato de benzilbutila (BBP) (C ₁₉ H ₂₀ O ₄)	< 0,1
Ftalato de di(2-etilexila) (DEHP) (C ₂₄ H ₃₈ O ₄)	< 0,1

Nota: O limite de concentração para os ftalatos analisados é de 0,1 % em relação à massa do material, conforme descrito na Portaria 563 – INMETRO de 29.12.2016 e Diretiva EU 215/863.

4 EQUIPE TÉCNICA


Técnica Thais Camila Souza do Carmo – FIPT

Este relatório só poderá ser reproduzido por inteiro e com a aprovação do cliente.

São Paulo, 10 de janeiro de 2020.

CENTRO DE QUÍMICA E MANUFATURADOS
Laboratório de Análises Químicas
Químico João Paulo Amorim de Lacerda
Supervisor do ensaio
CRQ IV nº 04412170 – RE nº 8895
Assinado digitalmente

CENTRO DE QUÍMICA E MANUFATURADOS
Laboratório de Análises Químicas
Tecgs. Prod. Luciana dos Santos Galvão
Chefe do laboratório em exercício
CRQ nº 04265896 - RE nº 9049
Assinado digitalmente

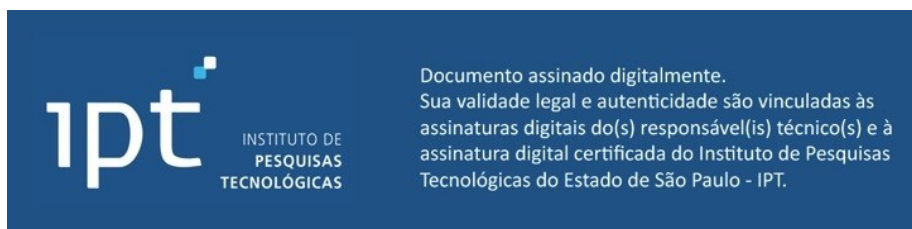

Os resultados apresentados neste documento se aplicam apenas ao item ensaiado ou calibrado.
Este documento não dá direito ao uso do nome ou da marca IPT, para quaisquer fins, sob pena de indenização.
A reprodução deste documento só poderá ser feita integralmente, sem nenhuma alteração.